


→Application


- container for the airport security service

~ 4 500 **kg** length 6058 x width 2438 x height 2591

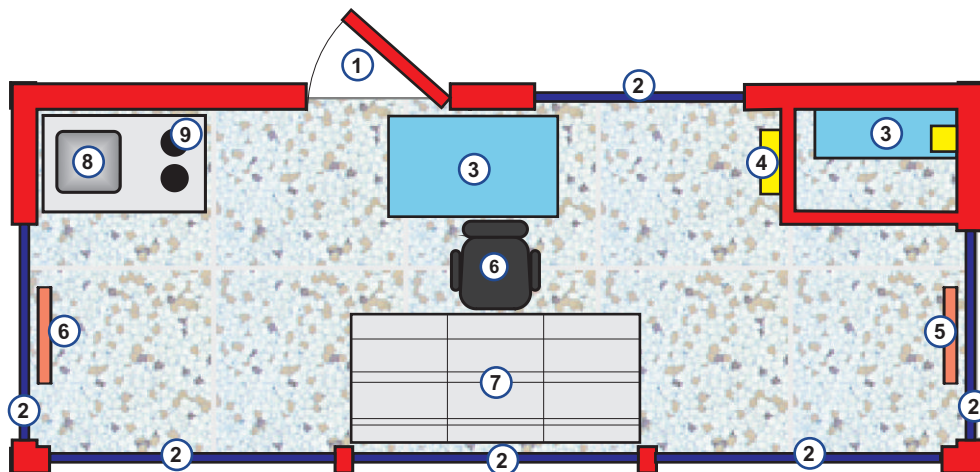

1. doors
2. windows
3. air conditioning
4. data distributor
5. electrical distributor
6. chair
7. working desk
8. kitchen sink
9. cooker

TCE - STANDARD	TC-SEC.2.NS4
Profile of entrance door [mm]	900 x 1995
Footing under the container	option
Double floor	no
Lighting	fluorescent
Emergency lighting	yes
Obstruction lights	option
Air condition	yes
Heating	yes
Open door alarm	no
Monitoring of container internal temperature	no
Working place TWS	1 places

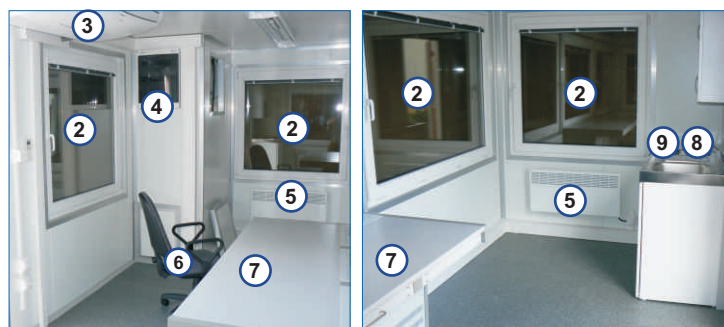

ORDERING CODES

Type series of container _____ **TC-SEC.2. x x x**

Thermal insulation _____

N = normal thermal insulation (-30/+35 °C)

A = arctic (-55/+35 °C, PUR80 mm thick container insulation, heating of entrance door doorframe)

T = tropic (-10/+55 °C)

Execution _____

S = stationary (cable ducts in the floor)

M = mobile execution (cable ducts through connectors in cable pockets)

Voltage system _____

2 = voltage system 3 x 220 V / 50-60 Hz

4 = voltage system 3 x 230/400 V / 50-60 Hz

0 = other voltage system, must be specified

© 2017 TRANSCON ELECTRONIC SYSTEMS, s.r.o., All rights reserved

chapter:

6.11**TC-SEC**

This page is intentionally left blank.