

RDL-10

➔ Application

- testing of regulators in the load mode
- simulation of regulator's operating conditions

➔ Description/Properties


- dummy load for constant current regulators (CCR)
- without forced cooling
- connection by cables with FAA L-823, Type I, Class A, Style 2 and Style 9 connectors
- output can be adjusted by rotary switches with step of 2 kW
- cable storage compartment at the bottom

➔ Electric parameters

- maximum nominal current 6.6 A (8.3 A model on a request)
- maximum nominal output 10 kW
- output regulation
0/2 kW/4 kW/6 kW/8 kW/10 kW

➔ Mechanical parameters

- weight ~50 kg
- dimensions 620x960x660 mm
- surface finish - galvanized
- connection cable length 3,5 m

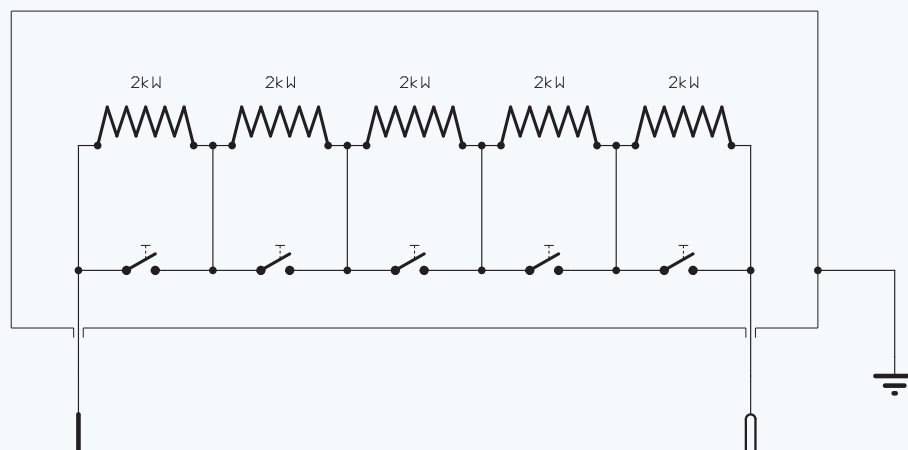

Wiring diagram

chapter:

3.2

RDL - 10

